



Inverter for BD150F Compressors 12/24V DC, 230V AC

Data Sheet (Replaces CH.49.A1.02)

Ordering

Inverter	BD150 Types
Code number: 12 - BD 150 (12V DC)	105N0912
Code number: 24 - BD 150 (24V DC)	105N0924

Electrical Specifications

Input voltage 12V DC version	12V DC nominal range 10-15V DC
Input voltage 24V DC version	24V DC nominal range 20-30V DC
Output Voltage	230V AC +/- 3%
Frequency	50Hz
Output wave form	pure sine-wave
Continuous output power	300 W
Standby consumption	5 mW
No load power consumption 12V DC version	8.5 W
No load power consumption 24V DC version	12 W
Efficiency at full load	> 90 %

Environmental Specifications



Ambient temperature during operation	-20°C to +55°C
Cooling	static air cooling

Mechanical Specifications




Housing	anodized extruded aluminum
Weight	4.5 kg ~ 10 lbs
AC outlet	3-pole female IEC socket
Housing dimensions in mm (L x W X H) mm	250 x 205 x 98
Mounting	Horizontal or Vertical
Alarm indication	overload, high temperature, short circuit, low battery
Enclosure	IP 21

Standards

CE marking	EMC Directive 89/336/EEC
Automotive directive	95/54/EC
Emission	EN 61000-6-3
Immunity	EN 61000-6-1
Safety	IEC 950

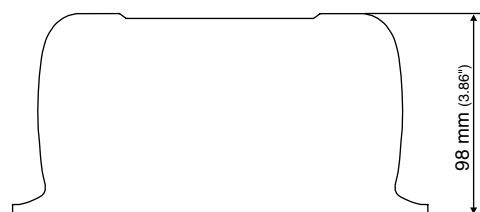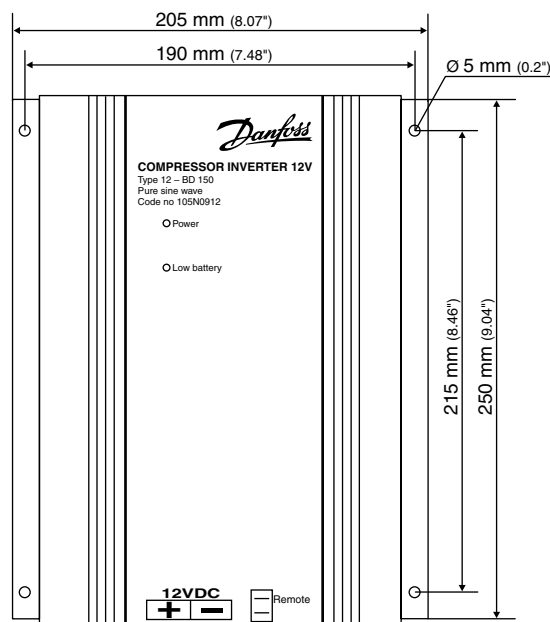

Application Examples

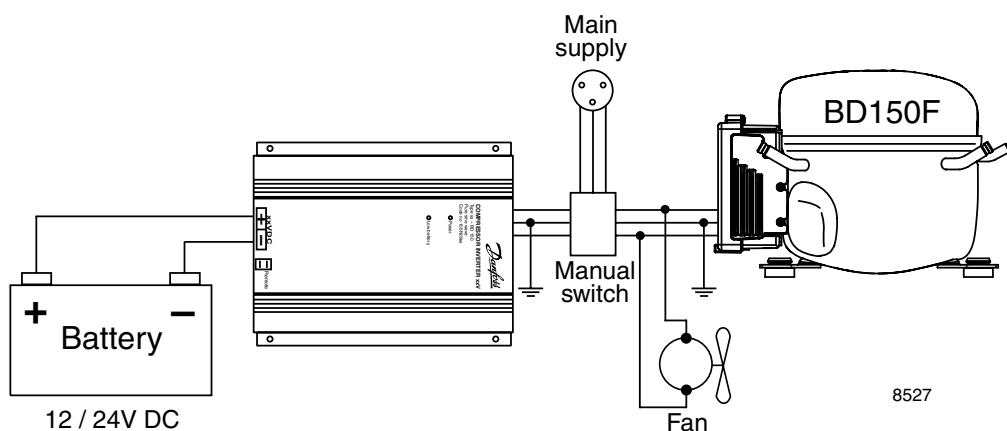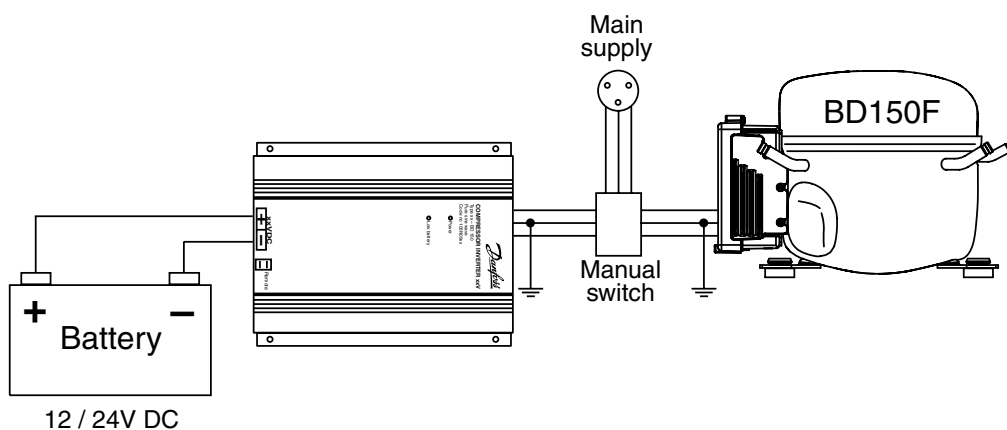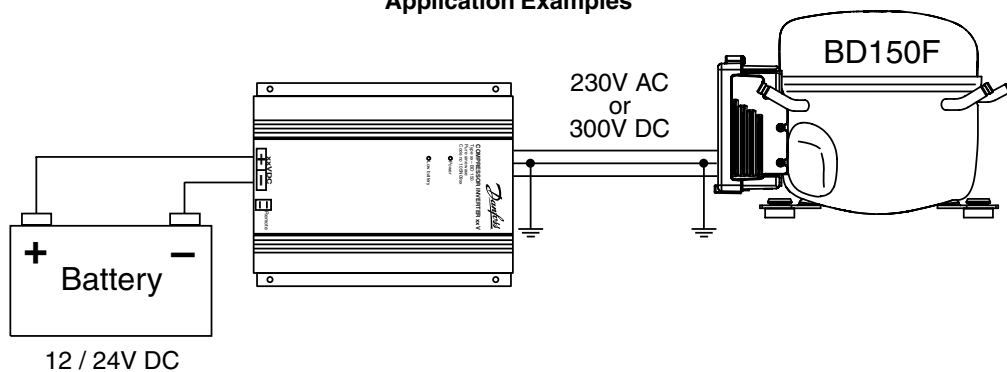

Wire dimensions

Size AWG Gauge	Cross section mm ²	Max length*		Max length*	
		12V operation		24V operation	
		ft.	m	ft.	m
6	16	8	2.5	16	5
4	25	13	4	26	8

*Length between battery and electronic unit

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.

